


POS. 3: T

bolted end plate connection EC 3-1-8 (04.25), NA: Deutschland

1. input report

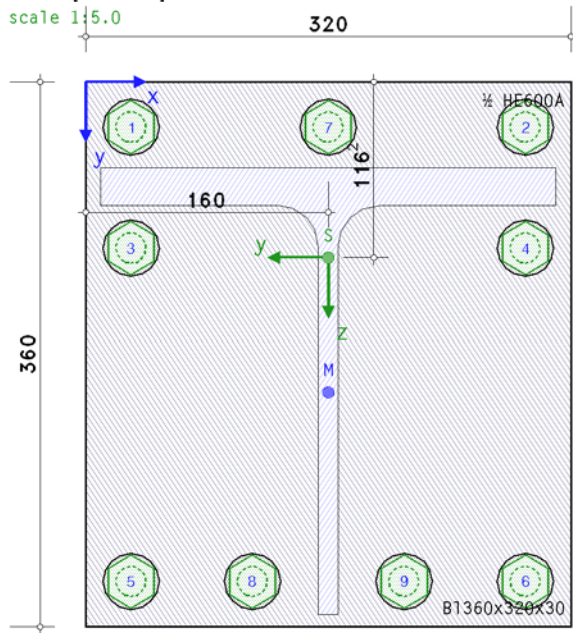

steel grade

steel grade S355

bolts

bolts have to be prestressed with with preloading $F_{p,c} = 154.2 \text{ kN} !!$

bolt class 10.9, bolt size M20

large wrench size (high strength bolt), preloaded (for info: preloading $F_{p,c}^* = 0.7 \cdot f_{yb} \cdot A_s = 154.2 \text{ kN}$)

thread included in the shear plane

connection

end plate (rectangular): thickness $t_p = 30.0 \text{ mm}$, width $b_p = 320.0 \text{ mm}$, length $l_p = 360.0 \text{ mm}$

beam: section 1/2 HE600A

coordinates of the beam centroid on end plate $x_s = 160.0 \text{ mm}$, $y_s = 116.2 \text{ mm}$

bolts:

coordinates of bolt axis:

$x_1 = 30.0 \text{ mm}$, $y_1 = 30.0 \text{ mm}$

$x_2 = 290.0 \text{ mm}$, $y_2 = 30.0 \text{ mm}$

$x_3 = 30.0 \text{ mm}$, $y_3 = 110.0 \text{ mm}$

$x_4 = 290.0 \text{ mm}$, $y_4 = 110.0 \text{ mm}$

$x_5 = 30.0 \text{ mm}$, $y_5 = 330.0 \text{ mm}$

$x_6 = 290.0 \text{ mm}$, $y_6 = 330.0 \text{ mm}$

$x_7 = 160.0 \text{ mm}$, $y_7 = 30.0 \text{ mm}$

$x_8 = 110.0 \text{ mm}$, $y_8 = 330.0 \text{ mm}$

$x_9 = 210.0 \text{ mm}$, $y_9 = 330.0 \text{ mm}$

calculation

verification:

calculation of internal forces and moments (FEM) and verifications of resistance

verification of end plate with the plastic method, verification of compression by contact

verification of bolts, check of distances

FEM-calculation:

bolts are plastically calculated, spring constant of bolts $c_f = 6175.1 \text{ kN/cm}$

plastic limit force $F_{t,f} = f_{t,f} \cdot F_{t,Rd} = 167.4 \text{ kN}$, $f_{t,f} = 0.950$, $F_{t,Rd} = (k_2 \cdot f_{ub} \cdot A_s) / \gamma_{M2} = 176.26 \text{ kN}$, $k_2 = 0.90$

effective elongation at failure $\varepsilon_{t,f} = f_{t,e} \cdot \varepsilon_{ub} = 2.3\%$, $f_{t,e} = 0.250$, $\varepsilon_{ub} = 9.0\%$

preload force of bolts $F_{p,c} = 154.2 \text{ kN} < F_{t,f}$ **ok**


effective foundation modulus of end plate $c_b = 7000.0 \text{ kN/cm}^3$

number / dimension of finite elements each direction $n_x / \Delta x = 46 / 7.0 \text{ mm}$, $n_y / \Delta y = 52 / 6.9 \text{ mm}$

max. 50 iteration steps (tolerance limit 5‰)

internal forces and moments referring to local axes of cross-section

LC	N_{Ed} kN	$M_{y,Ed}$ kNm	$V_{z,Ed}$ kN	$M_{z,Ed}$ kNm	$V_{y,Ed}$ kN	$M_{x,Ed}$ kNm
1	-45.81	-178.34	125.70	-24.25	-9.67	10.34
2	3.62	17.74	0.37	89.86	39.12	-3.27
3	-15.63	-76.27	43.37	-49.85	-17.49	2.27
4	-14.97	-39.91	48.47	93.76	39.76	3.08
5	-8.00	-44.37	36.57	90.43	38.31	-3.65
6	-29.22	-89.61	73.99	-25.08	-8.51	10.88
7	-4.02	-14.16	7.17	-50.43	-16.68	2.65
8	-45.53	-173.45	125.19	-24.94	-8.68	10.62
9	3.42	14.32	0.73	90.34	38.43	-3.46



partial safety factors for material

resistance of cross-sections $\gamma_{M0} = 1.00$

resistance of bolts, welds, plates in bearing $\gamma_{M2} = 1.25$

local stresses especially of the beam and of welds are not considered !

utilizations

Lc	U_p	U_σ	U_b	U_{pl}	$U_{pl,s}$	$U_{wt,s}$	$U_{t,s}$	$U_{vt,s}$	$U_{b,s}$	U
1	0.747	0.747	0.430	0.652	0.799	0.512	0.225	0.912	0.088	0.912*
2	0.533	0.533	0.401	0.395	0.182	0.182	0.225	0.699	0.016	0.699
3	0.505	0.505	0.245	0.283	0.177	0.177	0.225	0.707	0.024	0.707
4	0.748	0.748	0.584	0.399	0.569	0.405	0.225	0.771	0.045	0.771
5	0.746	0.746	0.562	0.389	0.542	0.395	0.225	0.709	0.025	0.746
6	0.322	0.322	0.190	0.322	0.141	0.141	0.216	0.794	0.052	0.794
7	0.281	0.281	0.212	0.217	0.135	0.135	0.212	0.658	0.010	0.658
8	0.740	0.740	0.399	0.634	0.587	0.420	0.225	0.912	0.088	0.912
9	0.549	0.549	0.407	0.397	0.189	0.189	0.225	0.698	0.016	0.698

U_p : utilization of end plate; U_σ : utilization of end plate due to stress; U_b : utilization of end plate due to compression by contact

U_{pl} : min. plastic utilization of the connection; $U_{pl,s}$: plastic utilization of tensile forces of bolts; $U_{wt,s}$: utilization of bolts due to elongation

$U_{t,s}$: utilization of bolts due to tension; $U_{vt,s}$: utilization of bolts due to shear; $U_{b,s}$: utilization of bolts due to bearing resistance

U: total utilization

*) maximum utilization

2. final result

maximum utilization of end plate due to 9 Lc: max U_p with corresponding values

node	x mm	y mm	u_z mm	b_z N/mm ²	m_{xx} kNm/m	m_{yy} kNm/m	m_{xy} kNm/m	q_x kN/m	q_y kN/m	U_p
2449	320.0	69.2	0.270	0.00	-5.59	-60.91	-0.47	1006.91	14.89	0.748

x,y: node coordinates; u_z : deformations (lifting off positive); b_z : compression by contact (compression positive); m_{xx}, m_{yy}, m_{xy} : moments
 q_x, q_y : shear forces; q_x, q_y : shear forces; U_p : utilization of end plate

maximum utilization of bolts due to 9 Lc: max U_s with corresponding values

	x mm	y mm	F_t kN	U_{wt}	U_{vt}	U_b	U_s
1	30.0	30.0	167.44	0.389	0.796	0.036	0.796
2	290.0	30.0	159.30	0.139	0.767	0.037	0.767
3	30.0	110.0	167.44	0.500	0.792	0.025	0.792
4	290.0	110.0	159.97	0.140	0.746	0.023	0.746
5	30.0	330.0	154.22	0.133	0.912	0.088	0.912
6	290.0	330.0	154.22	0.133	0.773	0.045	0.773
7	160.0	30.0	167.44	0.365	0.769	0.026	0.769
8	110.0	330.0	154.22	0.133	0.868	0.073	0.868
9	210.0	330.0	154.22	0.133	0.814	0.056	0.814

x,y: bolt coordinates; F_t : bolt force; U_{wt} : utilization due to elongation; U_{vt} : utilization due to shear

U_b : utilization due to bearing resistance; U_s : utilization of bolts

maximum utilization of end plate [Lc 4]

maximum utilization of bolts due to elongation [Lc 1]

maximum utilization of bolts [Lc 1]

maximum utilization [Lc 1]

max $U_p = 0.748 < 1$ ok

max $U_{wt,s} = 0.512 < 1$ ok

max $U_s = 0.912 < 1$ ok

max $U = 0.912 < 1$ ok

verification succeeded



3. Lc 1 (decisive)

3.1. end plate

design values: $N = -45.81$ kN, $M_y = -178.34$ kNm, $M_z = -24.25$ kNm



deformations u_z [mm]

min $u_z = -0.0237$ mm, max $u_z = 0.3528$ mm

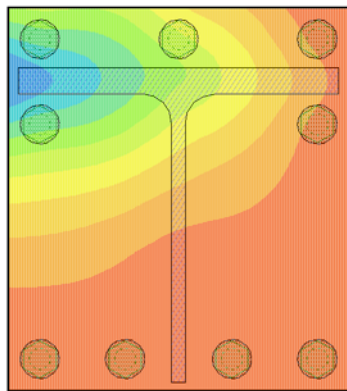

utilization of end plate U_p

min $U_p = 0.010$, max $U_p = 0.747$

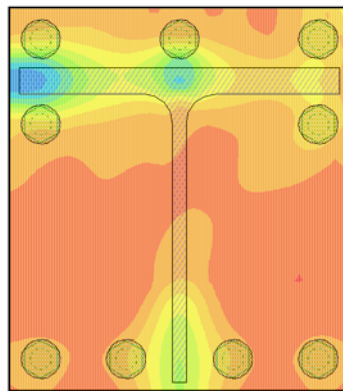

deformations lifting off positive

utilization of end plate

node	x mm	y mm	u_z mm	U_p
11	0.0	69.2	0.353	0.747

x,y: node coordinates; u_z : deformations (lifting off positive); U_p : utilization of end plate

utilization of bolts

	x mm	y mm	w_t mm	F_t kN	ε_{wt} %	U_{wt}
1	30.0	30.0	0.256	167.44	1.153	0.512
2	290.0	30.0	0.008	161.43	0.326	0.145
3	30.0	110.0	0.247	167.44	1.124	0.500
4	290.0	110.0	0.008	161.90	0.328	0.146
5	30.0	330.0	-0.000	154.22	0.300	0.133
6	290.0	330.0	-0.000	154.22	0.300	0.133
7	160.0	30.0	0.156	167.44	0.821	0.365
8	110.0	330.0	-0.000	154.22	0.300	0.133
9	210.0	330.0	-0.000	154.22	0.300	0.133

x,y: bolt coordinates; w_t : deformation (tension positive); F_t : bolt force; ε_{wt} : elongation
 U_{wt} : utilization due to elongation

utilization of end plate [node 11] $U_{max} = 0.747 < 1$ ok

utilization of bolts due to elongation [bolt 1] $U_{s,max} = 0.512 < 1$ ok

minimum plastic utilization of the connection $U_{pl,min} = 0.652 < 1$ ok

plastic utilization of tensile forces of bolts $U_{pl,t,s} = 0.799 < 1$ ok

3.2. bolts

design values: min $F_t = 154.22$ kN, max $F_t = 167.44$ kN, $V_z = 125.70$ kN, $V_y = -9.67$ kN,
 $M_x = 10.34$ kNm

verification of bolts

U_{tp} utilization due to punching shear failure, U_{vt} utilization due to shear in tension, U_b utilization due to bearing resistance, U utilization of bolts

bolt 1	$U_{tp,1} = 0.225$	$U_{vt,1} = 0.796$	$U_{b,1} = 0.036$	$U_1 = 0.796$
bolt 2	$U_{tp,2} = 0.217$	$U_{vt,2} = 0.763$	$U_{b,2} = 0.033$	$U_2 = 0.763$
bolt 3	$U_{tp,3} = 0.225$	$U_{vt,3} = 0.792$	$U_{b,3} = 0.025$	$U_3 = 0.792$
bolt 4	$U_{tp,4} = 0.218$	$U_{vt,4} = 0.746$	$U_{b,4} = 0.021$	$U_4 = 0.746$
bolt 5	$U_{tp,5} = 0.208$	$U_{vt,5} = 0.912$	$U_{b,5} = 0.088$	$U_5 = 0.912$
bolt 6	$U_{tp,6} = 0.208$	$U_{vt,6} = 0.773$	$U_{b,6} = 0.045$	$U_6 = 0.773$
bolt 7	$U_{tp,7} = 0.225$	$U_{vt,7} = 0.769$	$U_{b,7} = 0.026$	$U_7 = 0.769$
bolt 8	$U_{tp,8} = 0.208$	$U_{vt,8} = 0.868$	$U_{b,8} = 0.073$	$U_8 = 0.868$
bolt 9	$U_{tp,9} = 0.208$	$U_{vt,9} = 0.814$	$U_{b,9} = 0.056$	$U_9 = 0.814$
total:	$U_{tp} = 0.225$	$U_{vt} = 0.912$	$U_b = 0.088$	$U = 0.912 < 1$ ok

in utilization of bolts U_{max} ist minimum plastic utilization of the connection $U_{pl,min} = 0.652$
and plastic utilization of tensile forces of bolts $U_{pl,s} = 0.799$ is included.

utilization of bolts $U_{max} = 0.912 < 1$ ok

3.3. total

utilization Lc 1 $U_{\max} = 0.912 < 1$ **ok**

4. Regulations

EN 1990, Eurocode 0: Grundlagen der Tragwerksplanung;

Deutsche Fassung EN 1990:2002 + A1:2005 + A1:2005/AC:2010, Ausgabe Dezember 2010

EN 1990/NA, Nationaler Anhang zur EN 1990, Ausgabe Dezember 2010

EN 1993-1-1, Eurocode 3: Bemessung und Konstruktion von Stahlbauten -

Teil 1-1: Allgemeine Bemessungsregeln und Regeln für den Hochbau;

Deutsche Fassung EN 1993-1-1:2022, Ausgabe April 2025

EN 1993-1-1/NA, Nationaler Anhang zur EN 1993-1-1, Ausgabe April 2026

EN 1993-1-8, Eurocode 3: Bemessung und Konstruktion von Stahlbauten -

Teil 1-8: Bemessung von Anschlüssen; Deutsche Fassung EN 1993-1-8:2024, Ausgabe April 2025

EN 1993-1-8/NA, Nationaler Anhang zur EN 1993-1-8, Ausgabe April 2026

prEN 1993-1-14, Eurocode 3: Bemessung und Konstruktion von Stahlbauten -

Teil 1-14: Bemessung mithilfe von Finite-Element-Berechnung;

Deutsche und englische Fassung prEN 1993-1-14:2023, Ausgabe September 2023