



Simple Joint of Beams

EC 3-1-8 (12.10), NA: Deutschland

main girder:
scale 1:7.5

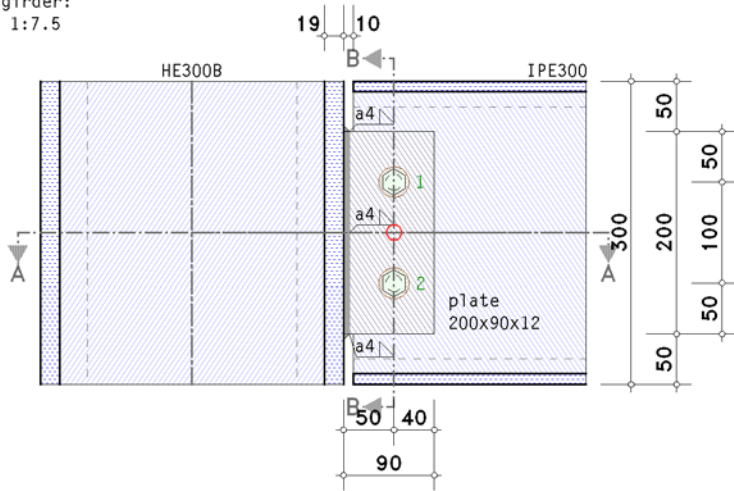


section B-B:

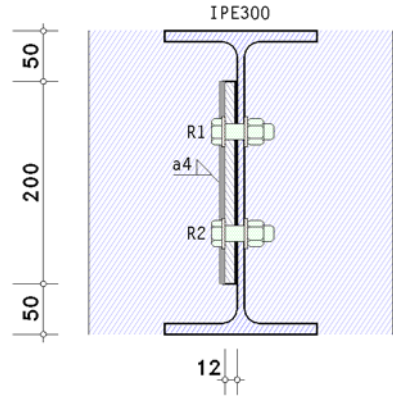

steel grade S 235
bolts M16-4.6

- hinge

section A-A:

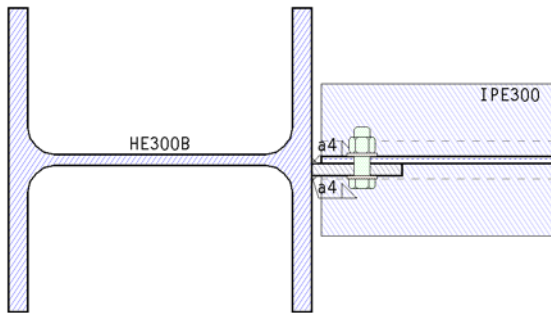

beam connection with fin plate, connected to the flange of the main girder

steel grade

steel grade S 235

bolts

bolt: bolt class 4.6, bolt size M16

shear plane passes through the unthreaded portion of the bolt

geometry

main girder

section HE300B

supported beam

section IPE300

joint configuration

fin plate: thickness $t_F = 12.0$ mm, length $l_F = 90.0$ mm, width $b_F = 200.0$ mm

plate lengths: $h_o = 0.0$ mm, $\ddot{u}_o = 50.0$ mm ($h_u = 0.0$ mm, $\ddot{u}_u = 50.0$ mm), $s = 10.0$ mm

distances between bolts at supported beam: $e_{z,0} = 50.0$ mm, $p_{z,1-2} = 100.0$ mm, $e_{x,0} = 40.0$ mm

thickness weld: $a_w = 4.0 \text{ mm}$

design resistance

verification of welds with the simplified method


internal forces and moments

Lk 1: $V_{1,Ed} = 75.00 \text{ kN}$

partial safety factors for material

resistance of cross sections $\gamma_{M0} = 1.00$

resistance of bolts, welds, plates in bearing $\gamma_{M2} = 1.25$



Simple Joint of Beams

single shear connection with one bolt-row in direction of load transfer: washer on both sides !!

distance of bolt rows at supported beam (right)

edge dist.:	$e_2 = 40.0 \text{ mm} > 1.2 \cdot d_0 = 21.6 \text{ mm},$	$e_2 = 40.0 \text{ mm} < 4 \cdot t_{\min} + 40 \text{ mm} = 68.4 \text{ mm}$
edge dist.:	$e_1 = 50.0 \text{ mm} > 1.2 \cdot d_0 = 21.6 \text{ mm},$	$e_1 = 50.0 \text{ mm} < 4 \cdot t_1 + 40 \text{ mm} = 68.4 \text{ mm}$
pitch:	$p_1 = 100.0 \text{ mm} > 2.2 \cdot d_0 = 39.6 \text{ mm},$	$p_1 = 100.0 \text{ mm} > \min(14 \cdot t_{\min}, 200 \text{ mm}) = 99.4 \text{ mm} \quad !!$
edge dist.:	$e_1 = 50.0 \text{ mm} > 1.2 \cdot d_0 = 21.6 \text{ mm},$	$e_1 = 50.0 \text{ mm} < 4 \cdot t_1 + 40 \text{ mm} = 68.4 \text{ mm}$

assumption: hinge is in centroid of bolts in the axis of supported beam

Lk 1:

design values

transformation of member forces to the reference point (intersection point of beam axis')

$M_{1,Ed} = V_{j1,Ed} \cdot e_1 = -15.00 \text{ kNm}, \quad e_1 = -200.0 \text{ mm}$
 $V_{1,Ed} = V_{j1,Ed} = 75.00 \text{ kN}$

design resistance of the connection

calculation of the point section:

bolt 1: $T_1 = T_{z,1} = 37.50 \text{ kN}$
bolt 2: $T_2 = T_{z,2} = 37.50 \text{ kN}$

shear force resistance

bolts in shear:

$U_i = T_i / (1 \cdot F_{v,Rd}), \quad V_{Rd,i} = V_{1,Ed} / U_i, \quad V_{Rd} = \min V_{Rd,i}$

design shear resistance per shear plane: $F_{v,Rd} = \alpha_v \cdot f_{ub} \cdot A / \gamma_{M2} = 38.60 \text{ kN}, \quad \alpha_v = 0.60$

bolt 1: $U_1 = 0.971 \quad V_{Rd,1} = 77.2 \text{ kN}$

bolt 2: $U_2 = 0.971 \quad V_{Rd,2} = 77.2 \text{ kN}$

design shear resistance total: $V_{Rd,1} = 77.2 \text{ kN}$

fin plate with bearing resistance:

$U_{z,i} = T_{z,i} / F_{b,z,Rd}, \quad U_{y,i} = T_{y,i} / F_{b,y,Rd}, \quad U_i = \max(U_{z,i}, U_{y,i}), \quad V_{Rd,i} = V_{1,Ed} / U_i, \quad V_{Rd} = \min V_{Rd,i}$

bolt 1: $F_{b,z,1} = 128.00 \text{ kN} \quad U_1 = 0.293 \quad V_{Rd,1} = 256.0 \text{ kN}$

bolt 2: $F_{b,z,2} = 128.00 \text{ kN} \quad U_2 = 0.293 \quad V_{Rd,2} = 256.0 \text{ kN}$

design bearing resistance total: $V_{Rd,2} = 256.0 \text{ kN}$

fin plate in tension and shear (shear block):

shear resistance $V_{eff,Rd} = (0.5 \cdot A_{nt} \cdot f_u) / \gamma_{M2} + (A_{nv} \cdot f_y / 3^{1/3}) / \gamma_{M0} = 195.22 \text{ kN}$

shear resistance total: $V_{Rd,3} = 195.2 \text{ kN}$

fin plate in bending and shear:

shear resistance $V_{Rd} = f_y / \gamma_{M0} / ((b' / W_{el})^2 + 3 \cdot (1/A + h' / W_t)^2)^{1/2} = 93.13 \text{ kN}$

shear resistance total: $V_{Rd,4} = 93.1 \text{ kN}$

beam web with bearing resistance:

$U_{z,i} = T_{z,i} / F_{b,z,Rd}, \quad U_{y,i} = T_{y,i} / F_{b,y,Rd}, \quad U_i = \max(U_{z,i}, U_{y,i}), \quad V_{Rd,i} = V_{1,Ed} / U_i, \quad V_{Rd} = \min V_{Rd,i}$

bolt 1: $F_{b,z,1} = 81.79 \text{ kN} \quad U_1 = 0.458 \quad V_{Rd,1} = 163.6 \text{ kN}$

bolt 2: $F_{b,z,2} = 81.79 \text{ kN} \quad U_2 = 0.458 \quad V_{Rd,2} = 163.6 \text{ kN}$

design bearing resistance total: $V_{Rd,5} = 163.6 \text{ kN}$

beam web in tension and shear (shear block):

shear resistance $V_{eff,Rd} = (0.5 \cdot A_{nt} \cdot f_u) / \gamma_{M2} + (A_{nv} \cdot f_y / 3^{1/3}) / \gamma_{M0} = 198.35 \text{ kN}$

shear resistance total: $V_{Rd,6} = 198.3 \text{ kN}$

shear resistance: $\min V_{Rd,F} = V_{Rd,1} = 77.2 \text{ kN}$

verification of the connection

$V_{Ed} = 75.0 \text{ kN}: \quad V_{Ed} / \min V_{Rd} = 0.971 < 1 \quad \text{ok.}$

weld verification

$F_{w,Ed} = 2.81 \text{ kN/cm} < F_{w,Rd} = 8.31 \text{ kN/cm} \Rightarrow U_w = 0.496 < 1$ **ok.**

verification result

maximum utilization: $\max U = 0.971 < 1$ **ok.**

Final Result

maximum utilization: design resistance $\max U = 0.971 < 1$ **ok.**

verification succeeded

Regulations

DIN EN 1990, Eurocode 0: Grundlagen der Tragwerksplanung;

Deutsche Fassung EN 1990:2002 + A1:2005 + A1:2005/AC:2010, Ausgabe Dezember 2010

DIN EN 1990/NA, Nationaler Anhang zur DIN EN 1990, Ausgabe Dezember 2010

DIN EN 1993-1-1, Eurocode 3: Bemessung und Konstruktion von Stahlbauten -

Teil 1-1: Allgemeine Bemessungsregeln und Regeln für den Hochbau;

Deutsche Fassung EN 1993-1-1:2005 + AC:2009, Ausgabe Dezember 2010

DIN EN 1993-1-1/NA, Nationaler Anhang zur DIN EN 1993-1-1, Ausgabe Dezember 2010

DIN EN 1993-1-8, Eurocode 3: Bemessung und Konstruktion von Stahlbauten -

Teil 1-8: Bemessung von Anschlüssen;

Deutsche Fassung EN 1993-1-8:2005 + AC:2009, Ausgabe Dezember 2010

DIN EN 1993-1-8/NA, Nationaler Anhang zur DIN EN 1993-1-8, Ausgabe Dezember 2010

ECCS Document No. 126: European Recommendations for the Design of Simple Joints in Steel Structures.

ECCS TC10 - Structural Connections, 2009. J.P. Jaspart, J.F. Demonceau, S. Renkin, M.L. Guillaume