



1. input report

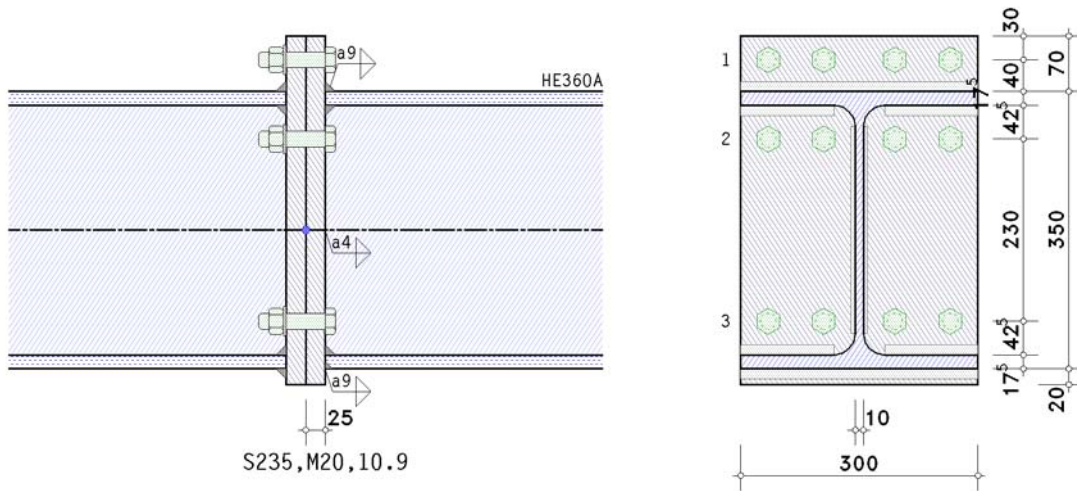

details (section A - A)

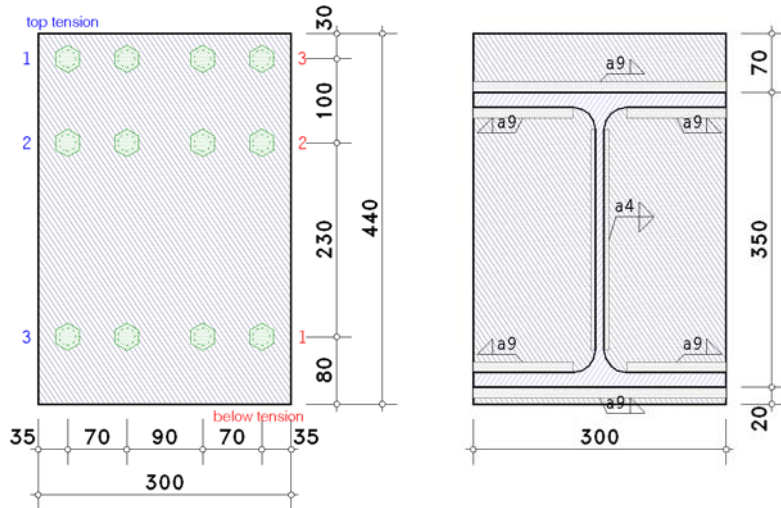

steel grade

steel grade S235

bolts

bolt class 10.9, bolt size M20, normal wrench size
shear plane passes through the unthreaded portion of the bolt

beam parameters

section HE360A

verification parameters

bolted end-plate connection

thickness $t_p = 25.0$ mm, width $b_p = 300.0$ mm, length $l_p = 440.0$ mm

projections $h_{p,o} = 70.0$ mm, $h_{p,u} = 20.0$ mm

bolts in connection:

3 bolt-rows with 4 bolts

row 1: 4 bolts, row 2: 4 bolts, row 3: 4 bolts
of these 2 bolt-rows top in tension (rows 1-2)

and 1 bolt-row for shear transfer top (row 3)

of these 1 bolt-row below in tension (row 3)

and 2 bolt-rows for shear transfer below (rows 2-3)

calculation method (4 bolts per row) acc. to Wagenknecht, Stahlbau-Praxis nach EC 3, Bd.3

centre distance between outer and inner bolt $w_2 = 70.0$ mm

centre distance of the bolts to the lateral edge of the end-plate $e_2 = 35.0$ mm

centre distance of the first bolt-row to the upper edge of the end-plate (end row) $e_o = 30.0$ mm

centre distance of the last bolt-row to the bottom edge of the end-plate (end row) $e_u = 80.0$ mm

centre distance of the bolt-rows from each other $p_{1-2} = 100.0$ mm, $p_{2-3} = 230.0$ mm

welds at the connection point:

beam flange top: fillet weld, weld thickness $a = 9.0$ mm

beam web: fillet weld, weld thickness $a = 4.0$ mm

beam flange below: fillet weld, weld thickness $a = 9.0$ mm

70% of compressive stress is transferred by contact

internal forces and moments at the joint periphery referring to the system axes

Lc 1: $M_{b,Ed} = 320.00$ kNm $V_{b,Ed} = 180.00$ kN


partial safety factors for material

resistance of cross-sections $\gamma_{M0} = 1.00$

resistance of members in stability failure $\gamma_{M1} = 1.10$

resistance of bolts, welds, plates in bearing $\gamma_{M2} = 1.25$

prestressing of high strength bolts $\gamma_{M7} = 1.10$



notes

no verification for cross-sections.

calculation of T-stub-resistance with the standard method.

check of data

ok

distances between bolts at end-plate

horizontal: $e_2 = 35.0$ mm $> 1.2 \cdot d_0 = 26.4$ mm, $e_2 = 35.0$ mm $< 4 \cdot t + 40$ mm = 140.0 mm
horizontal: $p_2 = 70.0$ mm $> 2.4 \cdot d_0 = 52.8$ mm, $p_2 = 70.0$ mm $< \min(14 \cdot t, 200$ mm) = 200.0 mm
horizontal: $p_2 = 90.0$ mm $> 2.4 \cdot d_0 = 52.8$ mm, $p_2 = 90.0$ mm $< \min(14 \cdot t, 200$ mm) = 200.0 mm
top-below: $e_1 = 30.0$ mm $> 1.2 \cdot d_0 = 26.4$ mm, $e_1 = 30.0$ mm $< 4 \cdot t + 40$ mm = 140.0 mm
top-below: $p_1 = 100.0$ mm $> 2.2 \cdot d_0 = 48.4$ mm, $p_1 = 100.0$ mm $< \min(14 \cdot t, 200$ mm) = 200.0 mm
top-below: $p_1 = 230.0$ mm $> 2.2 \cdot d_0 = 48.4$ mm, $p_1 = 230.0$ mm $> \min(14 \cdot t, 200$ mm) = 200.0 mm !!
top-below: $e_1 = 80.0$ mm $> 1.2 \cdot d_0 = 26.4$ mm, $e_1 = 80.0$ mm $< 4 \cdot t + 40$ mm = 140.0 mm
maximum values for spacings and edge distances should be in order to avoid local buckling and to prevent corrosion.

2. table of results

utilization/rotation

Lc	U_m	U_v	U_{sb}	U_{bc}	U	$S_{j,ini}$ MNm/rad	S_j MNm/rad	φ_j °
1	0.939	0.298	0.778	0.939	0.939*	421.2	140.4	0.131

U_m : utilization due to bending; U_v : utilization due to shear/bearing resistance; U_{sb} : utilization due to weld

U_{bc} : utilization due to partial internal forces and moments; U: utilization of the connection; $S_{j,ini}$: initial rotational stiffness

S_j : rotational stiffness; φ_j : rotation

*) maximum utilization

3. final result

maximum utilization: $\max U = 0.939 < 1$ ok

minimum rotational stiffness: $\min S_j = 140.4$ MNm/rad, $S_{j,ini} = 421.2$ MNm/rad, $\varphi_j = 0.131^\circ$

verification succeeded

requirement acc. to EC 3-1-8 should be respected

4. Regulations

EN 1990, Eurocode 0: Grundlagen der Tragwerksplanung;

Deutsche Fassung EN 1990:2002 + A1:2005 + A1:2005/AC:2010, Ausgabe Dezember 2010

EN 1990/NA, Nationaler Anhang zur EN 1990, Ausgabe Dezember 2010

EN 1993-1-1, Eurocode 3: Bemessung und Konstruktion von Stahlbauten -

Teil 1-1: Allgemeine Bemessungsregeln und Regeln für den Hochbau;

Deutsche Fassung EN 1993-1-1:2022, Ausgabe April 2025

EN 1993-1-1/NA, Nationaler appendix zur EN 1993-1-1, Ausgabe Oktober 2022

EN 1993-1-8, Eurocode 3: Bemessung und Konstruktion von Stahlbauten -

Teil 1-8: Bemessung von Anschlüssen;


Deutsche Fassung EN 1993-1-8:2024, Ausgabe April 2025

EN 1993-1-8/NA, Nationaler appendix zur EN 1993-1-8, Ausgabe November 2020

Gerd Wagenknecht: Stahlbau-Praxis nach Eurocode 3, Band 3, Beuth Verlag GmbH, 2014

5. Lc 1 (decisive)

5.1. design values

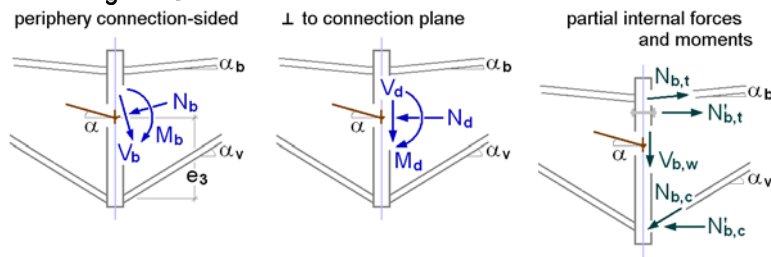

slope angle: $\alpha_b = \alpha = \alpha_v = 0^\circ$

internal forces and moments perpendicular to the connection planes

periphery beam

$M_d = 320.00 \text{ kNm}$, $V_d = 180.00 \text{ kN}$

partial internal forces and moments

internal forces and moments in the periphery end-plate-beam: $M'_d = M_d - V_d \cdot t_p = 315.50 \text{ kNm}$


$N_{b,t} = -N_d \cdot z_{bu} / z_b + M'_d / z_b = 948.87 \text{ kN}$, $z_b = 332.5 \text{ mm}$, $z_{bu} = 166.3 \text{ mm}$

$N_{b,c} = N_d \cdot z_{bo} / z_b + M'_d / z_b = 948.87 \text{ kN}$, $z_b = 332.5 \text{ mm}$, $z_{bo} = 166.3 \text{ mm}$

$V_{b,t} = -N_{b,t} \cdot \sin(\alpha_b) = 0.00 \text{ kN}$, $V_{b,c} = N_{b,c} \cdot \sin(\alpha_v) = 0.00 \text{ kN}$, $V_{b,w} = V_d - V_{b,t} - V_{b,c} = 180.00 \text{ kN}$

5.2. basic components

5.2.1. bc 5: end-plate in bending

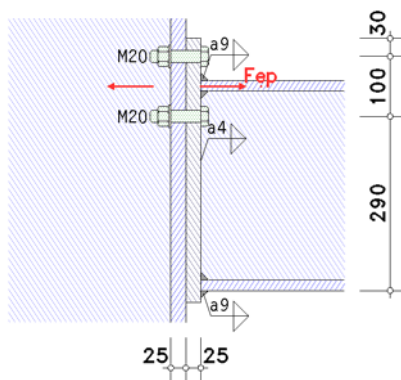

Only the essential sizes are sketched to scale.
The connection geometry is only hinted.

connections with 4 bolts per bolt-row are not treated in EC 3-1-8.

verification acc. to Wagenknecht, Stahlbau-Praxis nach EC 3, Bd.3.

extended part of end-plate

in projecting part of end plate only one bolt-row ($n_b = 1$) is considered (4 bolts per row).

effective length of the T-stub flange (end-plate):

in mode 1: $\Sigma l_{eff,1} = l_{eff,1} = \min(l_{eff,nc}, l_{eff,cp}) = 150.0 \text{ mm}$, $l_{eff,cp} = 303.7 \text{ mm}$

in mode 2: $\Sigma l_{eff,2} = l_{eff,2} = l_{eff,nc} = 150.0 \text{ mm}$

tension resistance of the T-stub flange:

in mode 1+2: $M_{pl,Rd} = (0.25 \cdot \Sigma l_{eff} \cdot t^2 \cdot f_y) / \gamma_{M0} = 5.51 \text{ kNm}$

$F_{t,Rd} = (k_2 \cdot f_{ub} \cdot A_s) / \gamma_{M2} = 176.26 \text{ kN}$, $k_2 = 0.90$

in mode 3: $\Sigma F_{t,Rd} = 4 \cdot n_b \cdot F_{t,Rd} = 705.02 \text{ kN}$

mode 1: complete yielding of the T-stub flange

$F_{T,1,Rd} = (4 \cdot M_{pl,1,Rd}) / m = 738.87 \text{ kN}$

mode 2: bolt failure simultaneously with yielding of the T-stub flange

$F_{T,2,Rd} = (2 \cdot M_{pl,2,Rd} + n \cdot \Sigma F_{t,Rd}) / (m+n) = 537.74 \text{ kN}$

mode 3: bolt failure

$F_{T,3,Rd} = \Sigma F_{t,Rd} = 705.02 \text{ kN}$, $F_{T,4,Rd} = 2 \cdot M_{pl,1,Rd} / m = 369.43 \text{ kN}$

tension resistance of the T-stub flange: $F_{T,Rd} = \min(F_{T,1,Rd}, F_{T,2,Rd}, F_{T,3,Rd}) = 537.74 \text{ kN}$

resistance of a fillet weld (req.1): $f_{1w,d} = f_u / (\beta_w \cdot \gamma_{M2}) = 360.0 \text{ N/mm}^2$

tension resistance of welds: $F_{T,w,Rd} = 2^{1/2} \cdot f_{1w,d} \cdot a \cdot l_{eff} = 687.31 \text{ kN}$ ($\geq 537.74 \text{ kN}$, not decisive)

resistance and effective length of end-plate in bending (projection)

$F_{t,ep,Rd,1} = 537.74 \text{ kN}$, $l_{eff,1} = 150.0 \text{ mm}$

part of end-plate between beam flanges

equivalent T-stub flange (each individual bolt-row):

here: number of bolt-rows $n_b = 1$

ROW 2 (4 bolts per row)

effective length of the T-stub flange (end-plate):

in mode 1: $\Sigma l_{eff,1} = l_{eff,1} = \min(l_{eff,nc}, l_{eff,cp}) = 283.8 \text{ mm}$, $l_{eff,cp} = 321.4 \text{ mm}$

in mode 2: $\Sigma l_{eff,2} = l_{eff,2} = l_{eff,nc} = 283.8 \text{ mm}$

tension resistance of the T-stub flange:

in mode 1+2: $M_{pl,Rd} = (0.25 \cdot \Sigma l_{eff} \cdot t^2 \cdot f_y) / \gamma_{M0} = 10.42 \text{ kNm}$

$F_{t,Rd} = (k_2 \cdot f_{ub} \cdot A_s) / \gamma_{M2} = 176.26 \text{ kN}$, $k_2 = 0.90$

in mode 3: $\Sigma F_{t,Rd} = 4 \cdot n_b \cdot F_{t,Rd} = 705.02 \text{ kN}$

mode 1: complete yielding of the T-stub flange

$F_{T,1,Rd} = (4 \cdot M_{pl,1,Rd}) / m = 1175.00 \text{ kN}$

mode 2: bolt failure simultaneously with yielding of the T-stub flange

$$F_{T,2,Rd} = (2 \cdot M_{pl,2,Rd} + (n_1 + n_2) \cdot 0.25 \cdot \Sigma F_{t,Rd} \cdot (3.6 - 1.6 \cdot n_1 / (n_1 + n_2))) / (m + n_1 + n_2) = 482.12 \text{ kN}$$

mode 3: bolt failure

$$F_{T,3,Rd} = 0.9 \cdot \Sigma F_{t,Rd} = 634.52 \text{ kN}, \quad F_{T,4,Rd} = (3.6 \cdot M_{pl,1,Rd}) / (1.8 \cdot m + 0.8 \cdot n_1) = 313.00 \text{ kN}$$

tension resistance of the T-stub flange: $F_{T,Rd} = \min(F_{T,1,Rd}, F_{T,2,Rd}, F_{T,3,Rd}) = 482.12 \text{ kN}$

resistance of a fillet weld (req.1): $f_{1w,d} = f_u / (\beta_w \cdot \gamma_{M2}) = 360.0 \text{ N/mm}^2$

tension resistance of welds: $F_{T,w,Rd} = 2^{1/2} \cdot f_{1w,d} \cdot a \cdot l_{eff} = 577.94 \text{ kN} (\geq 482.12 \text{ kN}, \text{ not decisive})$

resistances and effective lengths of end-plate in bending (per bolt-row):

$$F_{ep,Rd,2} = 482.12 \text{ kN}, \quad l_{eff,2} = 283.8 \text{ mm}$$

5.2.2. bc 7: beam flange and web in compression


flange below: section class 1

web: section class 1

total: section class 1

section class of the beam: 1

taking into account the moment-shear force-interaction $V_{Ed} = 180.0 \text{ kN}$

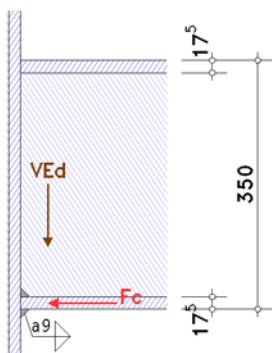

Only the essential sizes are sketched to scale.
The connection geometry is only hinted.

stress due to bending with shear force: $V_{Ed} = 180.0 \text{ kN} \leq 332.1 \text{ kN} = 0.5 \cdot V_{pl,Rd}/2 \Rightarrow$ no effect

resistance $M_{c,Rd} = M_{pl,Rd} = (W_{pl} \cdot f_y) / \gamma_{M0} = 490.75 \text{ kNm}$, $W_{pl} = 2088.29 \text{ cm}^3$

resistance of flange and web in compression

$$F_{c,f,Rd} = M_{c,Rd} / (h - t_f) = 1475.94 \text{ kN}$$

resistance of welds

compression force $N_{c,Ed} = 442.8 \text{ kN}$ (70% compressive contact)

$\sigma_{1,w,Ed} = 116.0 \text{ N/mm}^2 < f_{1w,d} = 360.0 \text{ N/mm}^2 \Rightarrow U = 0.322 < 1$

$\sigma_{2,w,Ed} = 58.0 \text{ N/mm}^2 < f_{2w,d} = 259.2 \text{ N/mm}^2 \Rightarrow U = 0.224 < 1$

resistance of the upper beam flange:

stress due to bending with shear force: $V_{Ed} = 180.0 \text{ kN} \leq 332.1 \text{ kN} = 0.5 \cdot V_{pl,Rd}/2 \Rightarrow$ no effect

resistance $M_{c,Rd} = M_{pl,Rd} = (W_{pl} \cdot f_y) / \gamma_{M0} = 490.75 \text{ kNm}$, $W_{pl} = 2088.29 \text{ cm}^3$

resistance of flange and web in compression

$$F_{c,f,Rd} = M_{c,Rd} / (h - t_f) = 1475.94 \text{ kN}$$


resistance of welds

compression force $N_{c,Ed} = 442.8 \text{ kN}$ (70% compressive contact)

$\sigma_{1,w,Ed} = 116.0 \text{ N/mm}^2 < f_{1w,d} = 360.0 \text{ N/mm}^2 \Rightarrow U = 0.322 < 1$

$\sigma_{2,w,Ed} = 58.0 \text{ N/mm}^2 < f_{2w,d} = 259.2 \text{ N/mm}^2 \Rightarrow U = 0.224 < 1$

5.2.3. bc 8: beam web in tension

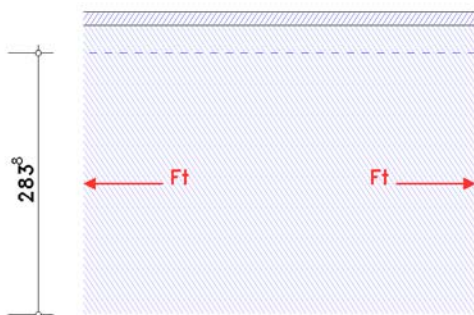

Only the essential sizes are sketched to scale.
The connection geometry is only hinted.

each individual bolt-row:

row 2

effective width $b_{eff,t,wb} = 283.8 \text{ mm}$ (l_{eff} from bc 5)

resistance of a beam web in tension

$$F_{t,wb,Rd} = b_{eff,t,wb} \cdot t_{wb} \cdot f_y / \gamma_{M0} = 666.92 \text{ kN}$$

resistance of a fillet weld (req.1): $f_{1w,d} = f_u / (\beta_w \cdot \gamma_{M2}) = 360.0 \text{ N/mm}^2$

tension resistance of welds: $F_{t,w,Rd} = 2^{1/2} \cdot f_{1w,d} \cdot a \cdot b_{eff,t} = 577.94 \text{ kN}$


total loading capacity of plate: $F_{t,wb,Rd} = F_{t,w,Rd} = 577.94 \text{ kN}$

resistance of a beam web in tension (per bolt-row)



$$F_{t,wb,Rd,2} = 577.94 \text{ kN}, \quad b_{eff,t,wb} = 283.8 \text{ mm} \quad (\text{s. bc 5})$$


5.2.4. bc 10: bolts in tension



Only the essential sizes are sketched to scale.
The connection geometry is only hinted.

tension resistance of one bolt $F_{t,Rd} = (k_2 \cdot f_{ub} \cdot A_s) / \gamma_{M2} = 176.26 \text{ kN}$, $k_2 = 0.90$
 punching shear load capacity of a bolt $B_{p,Rd} = (0.6 \cdot \pi \cdot d_m \cdot t_p \cdot f_u) / \gamma_{M2} = 427.17 \text{ kN}$, $t_p = 25.0 \text{ mm}$
 tension-/punching shear load capacity for 4 bolts: $\Sigma F_{tp,Rd} = 4 \cdot \min(F_{t,Rd}, B_{p,Rd}) = 705.02 \text{ kN}$


5.2.5. bc 11: bolts in shear



Only the essential sizes are sketched to scale.
The connection geometry is only hinted.

shear resistance $F_{v,Rd} = \alpha_v \cdot f_{ub} \cdot A / \gamma_{M2} = 150.80 \text{ kN}$, $\alpha_v = 0.60$
 shear resistance of 4 bolts (1-shear): $\Sigma F_{v,Rd} = 4 \cdot F_{v,Rd} = 603.19 \text{ kN}$

5.2.6. bc 12: plate with bearing resistance

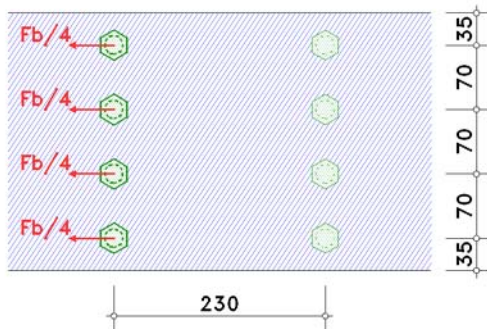

Only the essential sizes are sketched to scale.
The connection geometry is only hinted.

row 3

bolt 1: bearing resistance $F_{b,Rd} = (k_m \cdot \alpha_b \cdot f_u \cdot d \cdot t) / \gamma_{M2} = 432.00 \text{ kN}$, $k_m = 1.00$, $\alpha_b = 3.00$
 bolt 2: bearing resistance $F_{b,Rd} = (k_m \cdot \alpha_b \cdot f_u \cdot d \cdot t) / \gamma_{M2} = 432.00 \text{ kN}$, $k_m = 1.00$, $\alpha_b = 3.00$
 bolt 3: bearing resistance $F_{b,Rd} = (k_m \cdot \alpha_b \cdot f_u \cdot d \cdot t) / \gamma_{M2} = 432.00 \text{ kN}$, $k_m = 1.00$, $\alpha_b = 3.00$
 bolt 4: bearing resistance $F_{b,Rd} = (k_m \cdot \alpha_b \cdot f_u \cdot d \cdot t) / \gamma_{M2} = 432.00 \text{ kN}$, $k_m = 1.00$, $\alpha_b = 3.00$
 bearing resistance of 1x4 bolts: $\Sigma F_{b,Rd} = 1555.20 \text{ kN}$

5.3. connection capacity

5.3.1. moment resistance

distance of tension-bolt-rows from centre of compression: $h_1 = 381.3 \text{ mm}$, $h_2 = 281.3 \text{ mm}$

resistances acc. to EC 3-1-8, B.3.2.2(6) for bolt-rows considered individually

decisive basic components: 5, 8

row 1: $F_{tr,Rd} = 537.7 \text{ kN}$

row 2: $F_{tr,Rd} = 482.1 \text{ kN}$

resistance per bolt-row (tension)

row 1: $F_{tr,Rd} = 537.7 \text{ kN}$

row 2: $F_{tr,Rd} = 482.1 \text{ kN}$



$$\Sigma F_{tr,Rd}^* = 1019.9 \text{ kN}$$

deductions acc. to EC 3-1-8, B.3.2.2(7)

decisive basic component: 7

row 1: $F_{tr,Rd} = 537.7 \text{ kN}$

row 2: $F_{tr,Rd} = 482.1 \text{ kN}$

check acc. to EC 3-1-8, B.3.2.2(9)

decisive basic component: 10

row 1: $F_{tr,Rd} = 537.7 \text{ kN}$

resistance per bolt-row (bending)

row 1: $F_{tr,Rd} = 537.7 \text{ kN}$

row 2: $F_{tr,Rd} = 482.1 \text{ kN}$

$$\Sigma F_{tr,Rd} = 1019.9 \text{ kN}$$

potential failure by basic component 5

resistance of flanges (compression)

$$\Sigma F_{c,Rd}^* = 2951.9 \text{ kN}$$

moment resistance

$$M_{j,Rd} = \Sigma(F_{tr,Rd} \cdot h_r) = 340.6 \text{ kNm}$$

tension resistance

$$N_{j,t,Rd} = \Sigma F_{tr,Rd}^* = 1019.9 \text{ kN}$$

compression resistance

$$N_{j,c,Rd} = \Sigma F_{c,Rd}^* = 2951.9 \text{ kN}$$

5.3.2. shear/bearing resistance

resistance per bolt-row

decisive basic components: 11, 12

row 3: $F_{vr,Rd} = 603.2 \text{ kN}$

deductions depending on tension force (at full utilization of moment resistance)

decisive basic component: 10

row 3: $F_{vr,Rd} = 603.2 \text{ kN}$

resistance per bolt-row (shear/bearing resistance)

row 3: $F_{vr,Rd} = 603.2 \text{ kN}$

$$\Sigma F_{vr,Rd} = 603.2 \text{ kN}$$

shear/bearing resistance

$$V_{j,Rd} = \Sigma F_{vr,Rd} = 603.2 \text{ kN}$$

5.3.3. total

$$M_{j,Rd} = 340.6 \text{ kNm} \quad N_{j,t,Rd} = 1019.9 \text{ kN} \quad N_{j,c,Rd} = 2951.9 \text{ kN} \quad V_{j,Rd} = 603.2 \text{ kN}$$

5.4. verifications

5.4.1. verification of the connection capacity by means of the component method

internal moment: $M_{Ed} = M_d = 320.00 \text{ kNm}$

shear force: $V_{Ed} = |V_d| = 180.00 \text{ kN}$

$$M_{Ed}/M_{j,Rd} = 0.939 < 1 \quad \text{ok}$$

$$V_{Ed}/V_{j,Rd} = 0.298 < 1 \quad \text{ok}$$

5.4.2. verification of the connection capacity with partial internal forces and moments

tension force in the bolt-rows:

$$N'_{b,t} = (-N_d \cdot z_{bu} + M_d) / z = 966.04 \text{ kN}, \quad z = z_{eq} = 331.3 \text{ mm}, \quad z_{bu} = 166.3 \text{ mm}$$

compression force referring to the tension force in the bolt-rows:

$$N'_{b,c} = (N_d \cdot z_{bo} + M_d) / z = 966.04 \text{ kN}, \quad z = z_{eq} = 331.3 \text{ mm}, \quad z_{bo} = 165.0 \text{ mm}$$

bc 5: $F_{Rd} = \Sigma F_{t,ep,Rd,i} = 1028.3 \text{ kN}, \quad F_{Ed} = N'_{b,t} = 966.04 \text{ kN}$

$$F_{Ed} = 966.0 \text{ kN} < F_{Rd} = 1028.3 \text{ kN} \Rightarrow U = 0.939 < 1 \quad \text{ok}$$

bc 7: flange: $F_{Rd} = F_{c,f,Rd} = 1475.9 \text{ kN}, \quad F_{Ed} = N'_{b,c} = 966.04 \text{ kN}$

$$F_{Ed} = 966.0 \text{ kN} < F_{Rd} = 1475.9 \text{ kN} \Rightarrow U = 0.655 < 1 \quad \text{ok}$$

bc 8: $F_{Rd} = \Sigma F_{t,wb,Rd,i} = 1302.1 \text{ kN}, \quad F_{Ed} = N'_{b,t} = 966.04 \text{ kN}$

$$F_{Ed} = 966.0 \text{ kN} < F_{Rd} = 1302.1 \text{ kN} \Rightarrow U = 0.742 < 1 \quad \text{ok}$$

bc 10: $F_{Rd} = \Sigma 0.95 \cdot F_{t,Rd,i} = 1410.0 \text{ kN}, \quad F_{Ed} = N'_{b,t} = 966.04 \text{ kN}$

$$F_{Ed} = 966.0 \text{ kN} < F_{Rd} = 1410.0 \text{ kN} \Rightarrow U = 0.685 < 1 \quad \text{ok}$$

bc 11: $F_{Rd} = F_{v,Rd} = 603.2 \text{ kN}$ (without shear in tension), $F_{Ed} = |V_d| = 180.00 \text{ kN}$

$$F_{Ed} = 180.0 \text{ kN} < F_{Rd} = 603.2 \text{ kN} \Rightarrow U = 0.298 < 1 \quad \text{ok}$$

bc 12: $F_{Rd} = F_{b,Rd} = 1555.2 \text{ kN}$, $F_{Ed} = |V_{dl}| = 180.00 \text{ kN}$
 $F_{Ed} = 180.0 \text{ kN} < F_{Rd} = 1555.2 \text{ kN} \Rightarrow U = 0.116 < 1 \text{ ok}$

utilization partial internal forces and moments $U_{bc} = 0.939 < 1 \text{ ok}$

5.4.3. verification of welds at beam section

weld 1: beam flange in tension outer

welds 2,3: beam flange in tension inner


weld 8: beam flange in compression outer

welds 4,5: beam web double-sided

welds 6,7: beam flange in compression inner

weld 4: NA-DE: plate thickness $t_{max} \geq 3 \text{ mm}$: weld thickness $a = 4.0 \text{ mm} < a_{min} = t_{max}^{1/2} - 0.5 = 4.50 \text{ mm}$ EC 3-requirement !!

calculation section:

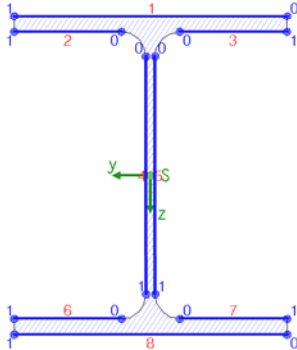

weld 1:	$a_w = 9.0 \text{ mm}$	$l_w = 300.0 \text{ mm}$
weld 2:	$a_w = 9.0 \text{ mm}$	$l_w = 118.0 \text{ mm}$
weld 3:	see weld 2	
weld 4:	$a_w = 4.0 \text{ mm}$	$l_w = 261.0 \text{ mm}$
weld 5:	see weld 4	
weld 6:	$a_w = 9.0 \text{ mm}$	$l_w = 118.0 \text{ mm}$
weld 7:	see weld 6	
weld 8:	$a_w = 9.0 \text{ mm}$	$l_w = 300.0 \text{ mm}$

design values referring to centroid of the section:

$M_{y,Ed} = -320.00 \text{ kNm}$, $V_{z,Ed} = 180.00 \text{ kN}$

cross-sectional properties referring to centroid of the line cross-section:

$\Sigma A_w = 117.36 \text{ cm}^2$, $A_{w,z} = 20.88 \text{ cm}^2$, $\Sigma l_w = 159.4 \text{ cm}$

$I_{w,y} = 28260.50 \text{ cm}^4$, $I_{w,z} = 8065.90 \text{ cm}^4$, $\Delta z_w = 0.0 \text{ mm}$

distribution of internal forces and moments:

weld 1: $N_w = 535.02 \text{ kN}$

weld 2: $N_w = 189.40 \text{ kN}$

weld 3: see weld 2

weld 4: $M_{y,w} = -6.71 \text{ kNm}$

weld 5: see weld 4

weld 6: $N_w = -189.40 \text{ kN}$

weld 7: see weld 6

weld 8: $N_w = -535.02 \text{ kN}$

from conventional distribution of shear force: $V_{z,w} = 180.00 \text{ kN}$

verifications in weld edges:

70% decrease of stress by pressure contact

weld 1, pt. 0:	$\sigma_{w,x} = 198.16 \text{ N/mm}^2$	$\Rightarrow U_w = 0.778 < 1 \text{ ok}$
weld 2, pt. 0:	$\sigma_{w,x} = 178.34 \text{ N/mm}^2$	$\Rightarrow U_w = 0.701 < 1 \text{ ok}$
weld 4, pt. 0:	$\sigma_{w,x} = 147.77 \text{ N/mm}^2$	$\tau_{w,z} = 86.21 \text{ N/mm}^2 \Rightarrow U_w = 0.713 < 1 \text{ ok}$
pt. 1:	$\sigma_{w,x} = -44.33 \text{ N/mm}^2$	$\tau_{w,z} = 86.21 \text{ N/mm}^2 \Rightarrow U_w = 0.450 < 1 \text{ ok}$
weld 6, pt. 0:	$\sigma_{w,x} = -53.50 \text{ N/mm}^2$	$\Rightarrow U_w = 0.210 < 1 \text{ ok}$
weld 8, pt. 0:	$\sigma_{w,x} = -59.45 \text{ N/mm}^2$	$\Rightarrow U_w = 0.234 < 1 \text{ ok}$

Result:

weld 1, pt. 0: $\sigma_{w,x} = 198.16 \text{ N/mm}^2$

Max: $\sigma_{1,w,Ed} = 280.24 \text{ N/mm}^2 < f_{1w,d} = 360.00 \text{ N/mm}^2$,

$\sigma_{2,w,Ed} = 140.12 \text{ N/mm}^2 < f_{2w,d} = 259.20 \text{ N/mm}^2 \Rightarrow U_w = 0.778 < 1 \text{ ok}$

5.4.4. verification result

maximum utilization: $\max U = 0.939 < 1 \text{ ok}$

5.5. rotational stiffness

stiffness coefficients

equivalent stiffness coefficient for 2 tension-bolt-rows:

1: $k_5 = 79.57 \text{ mm}$, $k_{10} = 5.70 \text{ mm} \Rightarrow k_{eff,1} = 1 / \Sigma(1/k_{i,1}) = 8.857 \text{ mm}$

2: $k_5 = 89.40 \text{ mm}$, $k_{10} = 5.70 \text{ mm} \Rightarrow k_{eff,2} = 1 / \Sigma(1/k_{i,2}) = 9.080 \text{ mm}$

equivalent internal lever arm $z_{eq} = \Sigma(k_{eff,r} \cdot h_r^2) / \Sigma(k_{eff,r} \cdot h_r) = 338.19 \text{ mm}$

äquivalenter stiffness coefficient $k_{eq} = \Sigma(k_{eff,r} \cdot h_r) / z_{eq} = 17.536 \text{ mm}$

rotational stiffness

initial rotational stiffness: $S_{j,ini} = (E \cdot z^2) / \Sigma(1/k_i) = 421190.6 \text{ kNm/rad}$, $z = z_{eq} = 338.2 \text{ mm}$, $\Sigma(1/k_i) = 0.057 \text{ mm}^{-1}$

$l M_{j,Ed} = 320.00 \text{ kNm} > 2/3 M_{j,Rd} = 227.07 \text{ kNm} \Rightarrow \mu = 3.0$

rotational stiffness: $S_{j,Rd} = S_{j,ini} / \mu = 140396.9 \text{ kNm/rad}$

rotation: $\varphi_{j,Ed} = M_{j,Ed} / S_{j,Rd} = 0.131^\circ$